




Flowmeter Order codes:

0045 . T . H . P . 01 . T . A - J

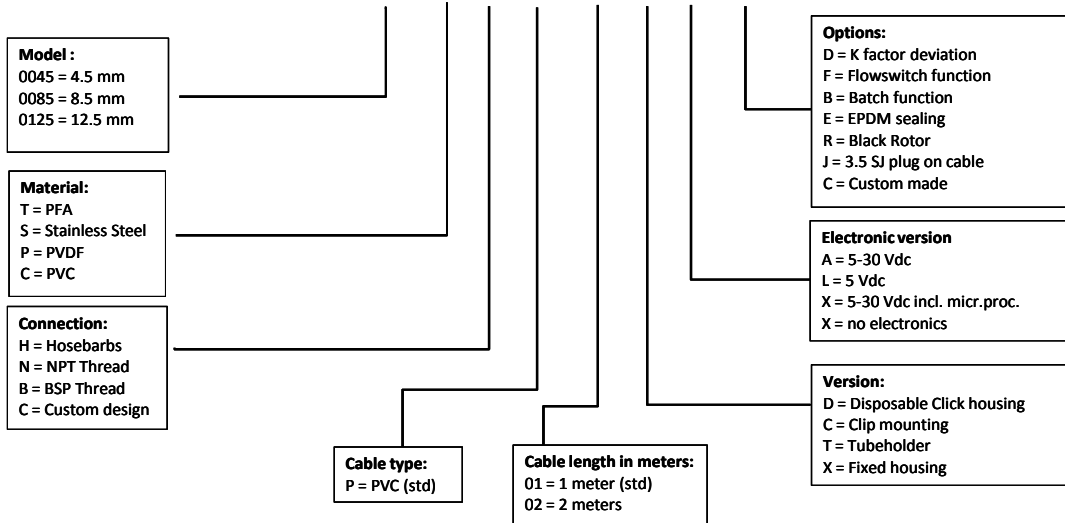

Availability Flowmeter Electronics:

L = 5 Voltage only. No functional reprogramming possible

A = Powersupply between 5 - 30 Vdc. ((No functional reprogramming possible)

X = Powersupply between 5 - 30 Vdc. Suitable for functional reprogramming, such as Flowswitch mode - Batch mode - K factor dividing

For reprogramming functional settings, a flowmeter configurator is required.

Standard, all version are with 5-30 V dc electronics and 1 meter cable.

All Flowmeters standard:

With 1 mtr PVC cable.
Fixed and SS versions with Viton seals
Standard Electronics 5-30 Vdc [A] without microprocessor / 1 meter PVC Cable
Other specs and specialties on request.

Delivery Conditions:

Additional small order charge € 25.00 for orders under € 250.00
Delivery strictly under Equflow general terms of delivery
All prices in Euro € without VAT and ex works
Equflow BV VAT nbr: NL802667995B01

Equflow BV
Po box 6671
6503 GD Nijmegen
The Netherlands
T 0031 24 3792666
E sales@equflow.com
www.equflow.com